



The Quality Profile
★★★★★★

SOFTLINE SS70

VEKA SOFTLINE SS70 sliding door provides solutions for medium sized sliding doors with a sash height of 2.2m.

Based on the 70mm system depth, all kind of combination windows can be done seamlessly by using the VEKA AD70 system for white but also for Acryl-Color CoEx window. Additional Clip-on profiles provide a variety of fly-net applications.

- ◆ System U_f 2.2 W/m²·K (including steel reinforcements)
- ◆ System depth 70mm – 3 Chambers
- ◆ Glazing width range from 4mm to 24mm
- ◆ Available in profile wall thickness “Class A”

U-Values by Glass configuration



U-Value Std window	Glass Thickness	Glass Configuration	Glass U-Value
2.0 W/m ² ·K	22/24 mm	5ssLow-E+12/14Ar+5	1.50 W/m ² ·K
2.2 W/m ² ·K	22/24 mm	5ssLow-E+12/14A+5	1.75 W/m ² ·K
2.3 W/m ² ·K	19 mm	5ssLow-E+9A+5	2.0 W/m ² ·K
2.7 W/m ² ·K	22/24 mm	5+12/14Ar+5	2.5 W/m ² ·K

Color options


Standard White		White			
Acryl-Color COEX					
	dark brown	light grey	dark grey		
	Laminated				
moss green		dark oak	golden oak	mahogany	dark grey

SOFTLINE SS70

Type	Sliding Door
System Depth	70 mm
U-Value	U_f = 2.2 W/m ² ·K

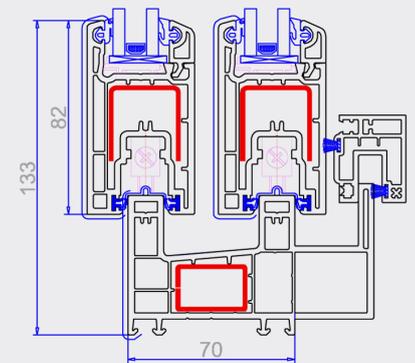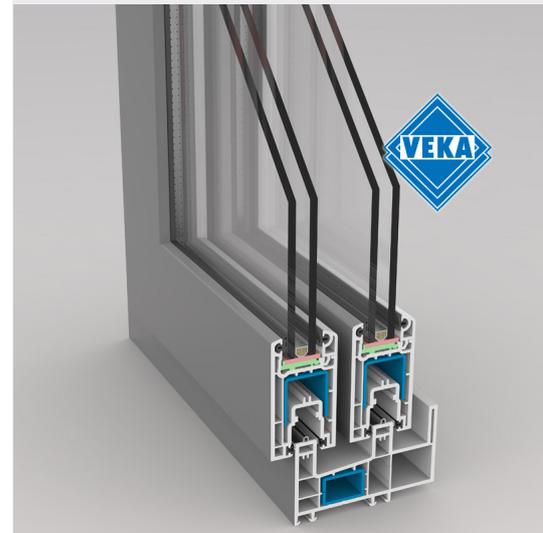

↑ Door Acryl-Color COEX

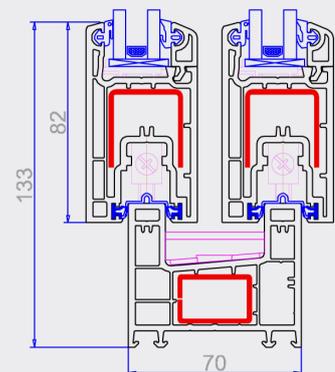

↑ Door standard



Yantai Taiwan Village

Owners of the Yantai Taiwan Village place utmost importance on having large balconies facing the ocean. Windows installed in these apartment buildings had to deliver good air tightness and water tightness performance. The developer especially chose VEKA SOFTLINE SS70 sliding doors for the good sealing performance. The project received high praise after the handover to the owners.

Product	SOFTLINE SS70
U_f	2.2 W/m ² ·K
Glass Configuration	5ssLow-E + 9A + 5
U-Value	2.3 W/m ² ·K

